

OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER

SECTION 23 TOWNSHIP 16 RANGE 4

DATE: 9-6-05

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-20-99

IN. S.P.C. E ZONE NAD '83

NAME: 16042304

N: 507421.9370(m)

E: 65921.3770(m)

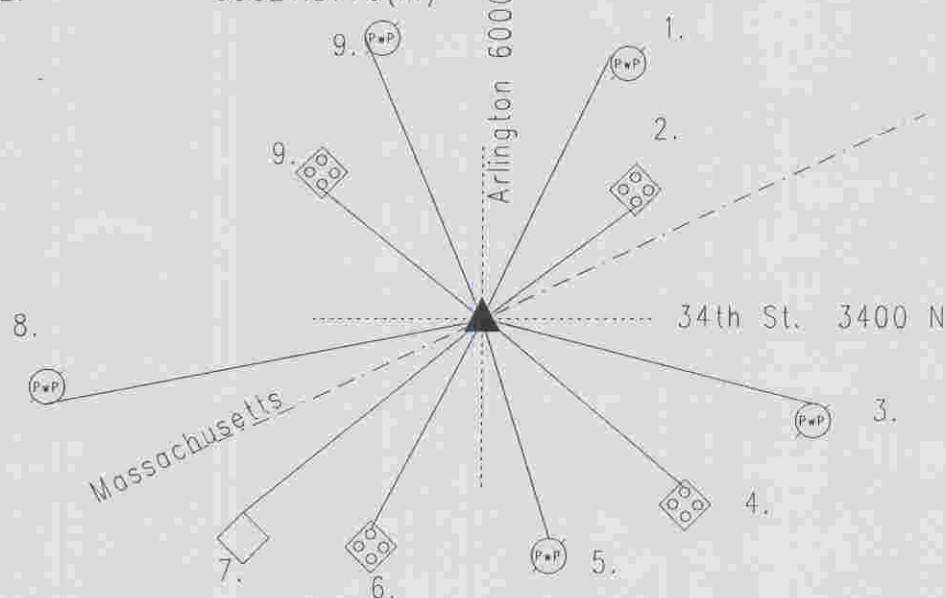

Original post set 1820 by Hendricks with witness: 26" beech S 22 W 30 links, 12" dogwood N 16 E 7 links per Marion County Atlas pg. 11. Hosbrook 7-21-1849 called large rock set with (1) stump of a witness and dug up part of the old stake and took new tree witness: 18" white oak S 22 W 18 links per Warren Township Legal Survey Book pg. 3. 9-26-77 called railroad spike over stone. Owens 8-8-60 called the same. Wilcoxon 3-22-76 called a brass plug. Gries 12-4-87 called same. Wilcoxon excavated 5-23-94 set Harrison as the corner in accordance with the Arlington Avenue construction project. Re-tied 7-20-99 by Kiste. Re-tied 9-6-05 by Kiste.

16042304

REF.	DISTANCE	DESCRIPTION
1.	89.63'	PK nail W PwP#1-416B 12"up
2.	92.57'	Cut 'x' S bolt of signal base
3.	98.80'	Mag nail w/brass washer N PwP#24-446A 12"up
4.	63.39'	Cut 'x' N bolt of signal base
5.	59.19'	PK nail NF PwP#94-446A 4"up
6.	92.30'	Cut 'x' N bolt of signal base
7.	89.35'	Northerly corner of concrete traffic signal box
8.	138.77'	Mag nail w/brass washer S PwP no# 12"up
9.	64.37'	Cut 'x' S bolt of signal base
10.	91.28'	PK nail W PwP#226-415 B 10"up